

# FLUSHFIT RECESSED TRACK & COMPONENTS



Flushfit Recessed Track is a track recessed into the ceiling.

The track sits inside the ceiling lining and requires no brackets for installation. Flushfit track is 13mm high which is the standard thickness of ceiling lining sheet used in Australia (Gyprock).

Builders need to allow for a parallel gap of 18mm in the ceiling sheet to accommodate the track width. The track has a 5mm flange either side of the glide channel for the cut edge of the ceiling sheet to sit on, making for a superior finish.

The track length is available in continuous 6 meter lengths. When installations exceed 6 meters, tracks need to butt together. The track is available with 90° angle elbows to be butted up to the straight track, with a 150mm Bend Radius.


There is a choice of 32/35mm standard glides and end stops for pleated style curtain headings or the S-Wave and S-Fold Heading.

Tracks are cut 11mm shorter than the given length so that access to the glides is possible without having to take down the track.

Fitters are to position one end of the track hard up to one end to allow the 11mm gap at the other. The cover plate attached to the end stop covers the gap.

Flushfit Recessed Track comes in our standard "White".

## FLUSH FIT TRACK PROFILE

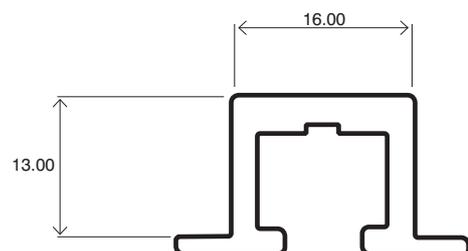

All measurements are in mm.

UNDERNEATH VIEW:



SIDE VIEW:



## Components:



FLUSH FIT END STOP



STANDARD GLIDERS



S-FOLD GLIDERS

Also available with S-wave tape, glides, hooks & pendants.